




SECTION b-b

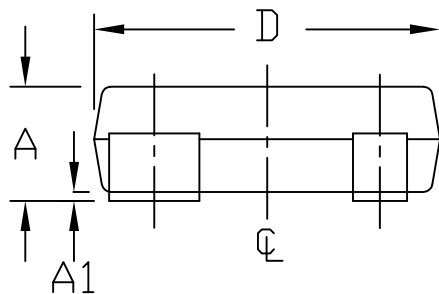

SEE DETAIL "A"

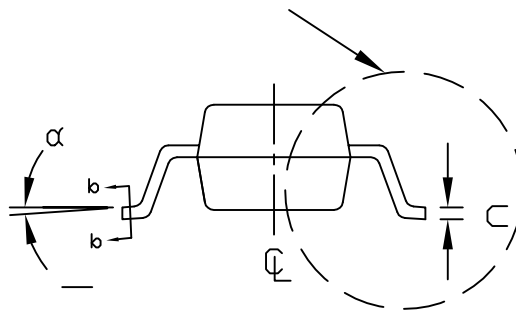

DETAIL "A"

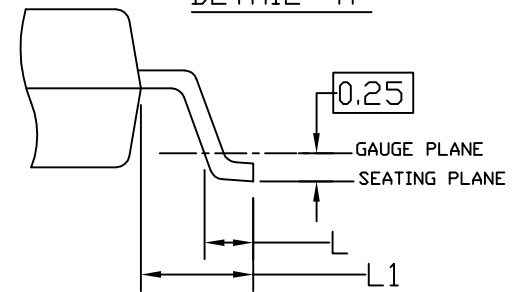

-DRAWING NOT TO SCALE-





TITLE:			
PACKAGE OUTLINE 4L SOT-143			
APPROVAL	DOCUMENT CONTROL NO.	REV.	1/2
	21-0052	F	

NOTES:

1. D&E DO NOT INCLUDE MOLD FLASH.
 2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006").
 3. CONTROLLING DIMENSION: MILLIMETERS.
 4. MEETS JEDEC T0253.
- △ THESE DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.08mm AND 0.15mm FROM THE LEAD TIP.

DIM	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.031	0.0394	0.048	0.80	1.000	1.22
A1	0.000	0.0022	0.006	0.01	0.056	0.15
b	0.014	0.0157	0.020	0.35	0.400	0.50
b1	0.012		0.018	0.30		0.45
b2	0.030	0.0323	0.035	0.76	0.820	0.89
b3	0.012		0.033	0.76		0.84
c	0.003	0.0051	0.008	0.08	0.130	0.20
c1	0.003		0.006	0.08		0.16
D	0.110	0.1150	0.120	2.80	2.920	3.04
E	0.083	0.0933	0.104	2.10	2.370	2.64
E1	0.047	0.0512	0.055	1.20	1.300	1.40
e	0.076 BSC.			1.92 BSC.		
e1	0.008 BSC.			0.20 BSC.		
L	0.016		0.024	0.40		0.60
L1	0.021 REF.			0.54 REF.		
S	0.018	0.0207	0.024	0.45	0.525	0.60
α	0°	2°	8°	0°	2°	8°
PKG CODES: U4-1, U4-2						

-DRAWING NOT TO SCALE-

 			
TITLE:			
PACKAGE OUTLINE 4L SOT-143			
APPROVAL	DOCUMENT CONTROL NO.	REV.	
	21-0052	F	2/2